

THIXATROL® DW 50

Universal polymeric high temperature / deep water flat rheology viscosifier for oil based drilling fluids

GENERAL INFORMATION

THIXATROL DW 50 is a unique proprietary organic polymer that generates an efficient rheological profile in synthetic based invert emulsion drilling fluids while having a minimal viscosity increase when subjected to reduced temperatures. This highly desirable flat rheological property is stable through 350°F and can be extended to applications beyond deep water drilling.

In addition to maintaining a consistent or flat rheological profile from 40°F through 350°F, **THIXATROL DW 50** is not toxic to marine life.

THIXATROL DW 50 exhibits an excellent balance of dispersibility for initial viscosity build, efficiency for cost effectiveness and tolerance to adverse conditions for reduced depletion rates. Control of ECD is significantly improved as compared to drilling fluids incorporating only conventional rheological additives.

CHEMICAL & PHYSICAL PROPERTIES

Composition	oil soluble polymer
Color	yellow to amber
Form	liquid
Specific gravity	0.96
Pour Point	0°F
pH	10 - 11
Solubility	water Insoluble
Storage	lined metal, glass or lined plastic

These are typical properties not to be used for specification purposes.

PERFORMANCE CHARACTERISTICS

- “Flat” rheological profile from 40°F through 350°F for reduced low temperature viscosity build and improved ECD control for the elimination or reduction of mud losses.
35% reduction in 40°F HSRR
- Stable to bottom hole temperatures in excess of 350°F
- PARCOM (Class D) / Mysid & Lepto compliant for global offshore applications
- Maintains HTHP fluid loss control
- Shear thinning rheological profile for improved ROP

- Compatible with conventional invert emulsion drilling fluid additives and contaminants
- Builds viscosity in clay free systems or with organoclays
- Efficient hole cleaning and suspension properties for sag control

APPLICATIONS

The required concentration of **THIXATROL DW 50** is dependent on the oil/water ratio, base oil type and density of the system as well as type and concentration of surfactants used as emulsifiers and wetting agents and type and concentration of organophilic clay. A fluid with a higher oil/water ratio (i.e. 90:10) will require more **THIXATROL DW 50** than a fluid with a lower oil/water ratio (i.e. 70:30). A higher density fluid will generally require less **THIXATROL DW 50** as compared to a lower density fluid. Generally, concentrations will be in the range of 0.5 to 5.0 pounds per barrel. The ratio of organophilic clay to **THIXATROL DW 50** will typically range from 1:0.25 to 1:1. Viscosity can be built in:

- Oil Based Drilling Fluids
- Completion Fluids
- Packer Fluids
- Invert Emulsion Drilling Fluids
- Workover Fluids
- Clay Free Drill –In Fluids

THIXATROL DW 50 can be added at the mud plant when building new mud, or can be added directly to the mud pits when building volume during the drilling process. **THIXATROL DW 50** should not be used in combination with any other polymeric rheological additives without first pilot testing. **THIXATROL DW 50** can be used with or without organophilic clay. The addition of some organophilic clay is recommended to achieve the most efficient and temperature stable rheological system.

Recommended organoclays are as follows:

- BHT below 300°F – BENTONE 155
- BHT above 300°F – BENTONE 38

continued...

THIXATROL® DW 50

The ratio of organoclay and **THIXATROL DW 50** should be maintained while treating at the well. Adequate agitation is necessary when incorporating **THIXATROL DW 50** into the oil based fluid. The amount of shear necessary will depend on the temperature of the synthetic oil, the rate of rheological additive addition, the oil/water ratio, and the amount of solids and/or weight material in the system.

THIXATROL DW 50 PARCOM / Mysid / Lepto Data

MW > 600 (bioaccumulation not likely)	Class D
Aerobic Biodegradation in seawater	OECD 306 9.5% at 2.0 mg/l
Marine invertebrate (Acartia Tonsa)	ISO 14669 LC50 (48 h)>2,000 mg/l
Marine Algal (Skeletonema Costatum)	OECD 201 EC50 (72 h): 730 mg/l
Marine Sediment (Corophium volutator)	PC 1995 10 day LC50>10,000 mg/kg
Re-worker	
Juvenile Turbot fish (Scophthalmus Maximus)	PC 1995 LC50 (96 h)>730 mg/l
Mysidopsis bahia	USEPA LC50 (96 hr)>1,000,000
Leptocheirus plumulosus	USEPA LC50 (96 hr) ratio-0.7



THIXATROL DW 50:BENTONE 38 PERFORMANCE IN OIL BASED DRILLING FLUIDS

	B 38 10#bbl	B 38:DW 50 6:1.5	B 38:DW 50 6:4.5	Mud Formulation (14 ppg;85:15)
120°F				C16-18IAO-172.1 gms BENTONE 38-X gms-mix 1' THIXATROL DW 50-Y mix 5' 1° Emulsifier A(amine)-15 gms mix 4" Lime-10 gms-mix1' CaCl2 Brine (12 wt%)-48 gms-mix25' Barite-337.2 gms-mix 10'
600 RPM	98	97	98	
300 RPM	66	62	63	
6 RPM	18	17	19	
ECD	14.4	14.4	14.4	
40°F				ECD Calculation Basis Mud Wt-14#gal HSR Visc-600 LSR Visc-300 Flow Rate-287 gpm OD hole-8.74 in OD pipe-4.5 in length-10,650 ft
600 RPM	325	190	179	
300 RPM	266	127	109	
6 RPM	102	43	20	
ECD	16.9	14.8	14.5	
Delta ECD	2.5	0.4	0.1	

continued...

THIXATROL® DW 50

THIXATROL DW 50 BENTONE 38 PERFORMANCE IN OIL BASED DRILLING FLUIDS

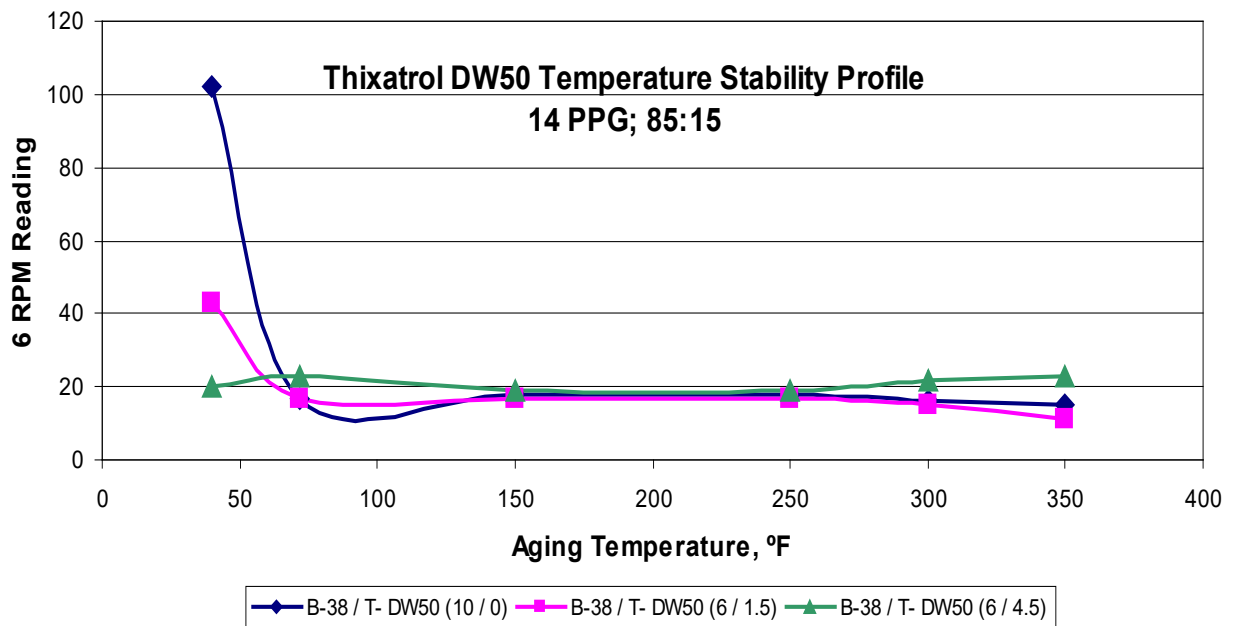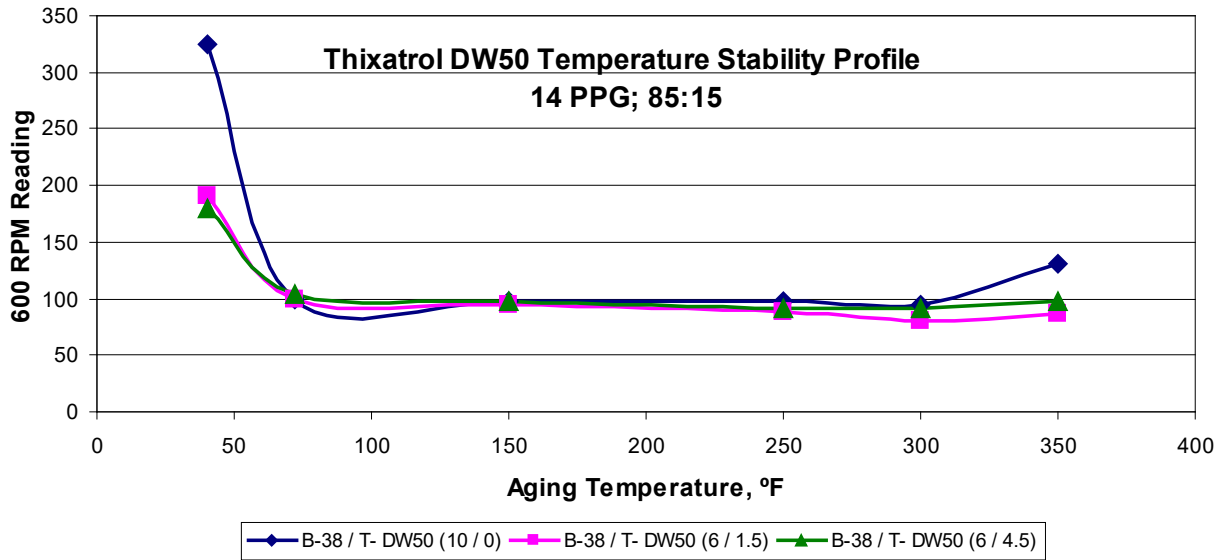


continued...

THIXATROL® DW 50


THIXATROL DW 50 : BENTONE 155

Low Temperature Viscosity Profile

Flat LSR Rheological Profile Through Hot & Cold Aging Cycles

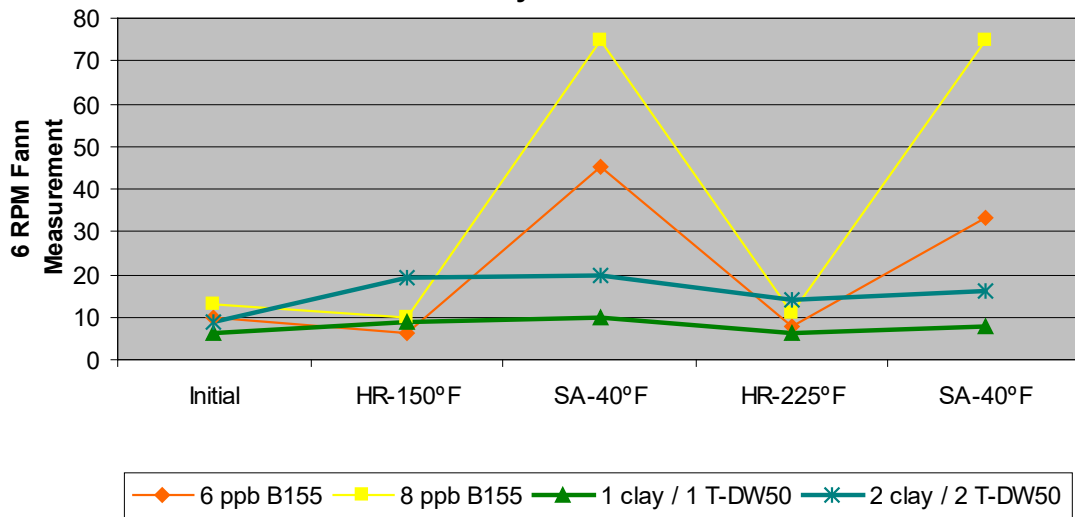

Flattened HSR Rheological Profile Through Hot & Cold Aging Cycles For Superior ECD Control

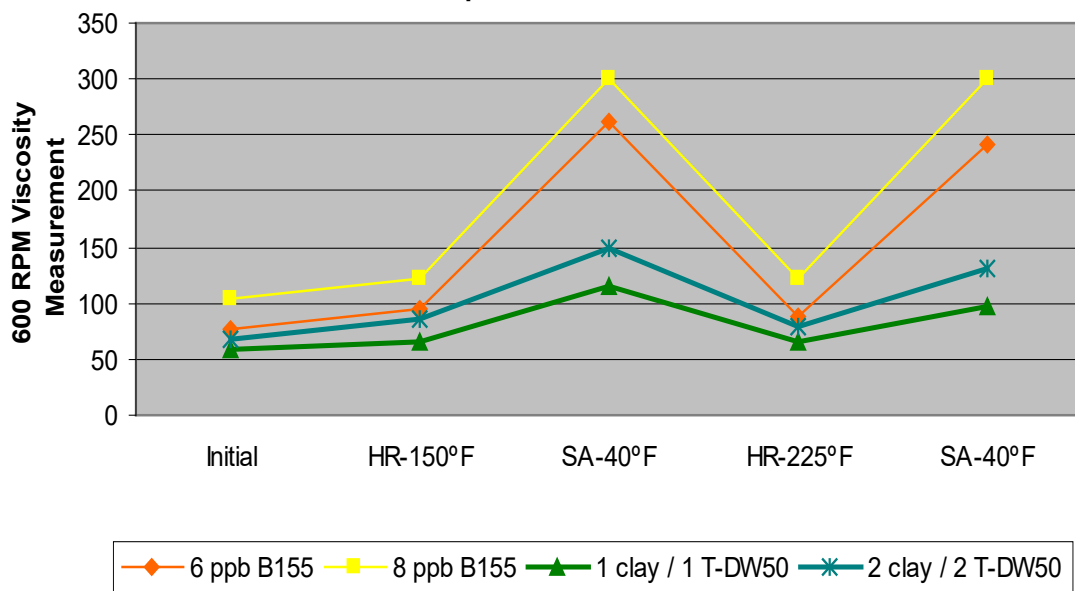

continued...

THIXATROL® DW 50**Mud Formulation**

C ₁₆ – C ₁₈ IAO	
Barite	12 #/gal
30% CaCl ₂ Brine	80:20
Primary Emulsifier	4 #/bbl
Wetting Agent	2 #/bbl
Lime	4 #/bbl

Health and Safety Data

Before using this product please consult our Material Safety Data Sheet for information on safe handling.

NOTE: The information herein is currently believed to be accurate. We do not guarantee its accuracy. Purchasers shall not rely on statements herein when purchasing any products. Purchasers should make their own investigations to determine if such products are suitable for a particular use. The products discussed are sold without warranty, express or implied, including a warranty of merchantability and fitness for use. Purchasers will be subject to a separate agreement which will not incorporate this document.

© Copyright 2018, Elementis Specialties, Inc. All rights reserved. Copying and/or downloading of this document or information therein for republication is not allowed unless prior written agreement is obtained from Elementis Specialties, Inc.

® Trademark of Elementis Specialties, Inc.

V01 Aug. 2019

North America

Elementis
469 Old Trenton Road
East Windsor, NJ 08512, USA
Tel.: +1 609 443 2500
Fax: +1 609 443 2422

Europe

Elementis UK Ltd.
c/o Elementis GmbH
Stolberger Strasse 370
50933 Cologne, Germany
Tel.: +49 221 2923 2066
Fax: +49 221 2923 2011

Asia

Deuchem (Shanghai) Chemical Co., Ltd.
99, Lianyang Road
Songjiang Industrial Zone
Shanghai, China 201613
Tel.: +86 21 5774 0348
Fax: +86 21 5774 3563