

NALZIN[®] FA 179

Flash rust inhibitor for waterborne coating systems



Key Benefits

- ❖ Effective reduction of flash-rust formation
- ❖ Minimization of in-can corrosion
- ❖ Improves long term corrosion resistance

Overview

NALZIN® FA 179 is an organic-zinc based compounds providing excellent flash-rust and in-can corrosion inhibition for both waterborne industrial and decorative coating systems.

NALZIN® FA 179 is a very powerful flash-rust inhibitor suitable for most applications. The product contains a small amount of sodium nitrite that guarantees effective and reliable performance.

Additionally, the products can also be used efficiently to inhibit in-can corrosion.

During drying of the coating film, the zinc-complex in both additives becomes insoluble and so helps to improve long-term corrosion resistance

NALZIN® FA 179

Composition	Complex zinc compound in a mixture with solvents
Appearance	Clear liquid
Solubility	Dispersable in water
Density at 20°C [g/ml] ASTM D 1172	app. 1.08
Viscosity at 20°C [mPas] ASTM D 2196	max. 250
Flash point [°C] ASTM D 65	>62°C

Incorporation

NALZIN® FA 179 should be added at the final let-down stage of the paint production process. In-can corrosion resistance typically requires 0.1-0.3 % of the additive. Flash-rust inhibition typically requires a loading level of 0.1-0.5%

NALZIN® FA 179 is best added into the grinding process to ensure uniform distribution. Optimum corrosion resistance is typically achieved at a loading of 0.1 – 0.6%.

A loading ladder study is recommended to determine the ideal addition level for either flash-rust inhibitor.

Features

- ◆ effective reduction of flash-rust formation
- ◆ Improvement of in-can corrosion resistance
- ◆ Enhancement of coatings long-term corrosion resistance
- ◆ Provides excellent storage stability

Practical examples


The significantly improved flash rust resistance with NALZIN® FA 179 is shown in the example below.

A loading of 0.3% NALZIN® FA 179 was added to a standard styrene-acrylic latex paint system, PVC 77%. The coating was then applied to a degreased steel panel and tested as above.

Flash rust formation area [%] after				
	1 hour	2 hours	3 hours	24 hours
Blank	5	5	10	80
NALZIN® FA 179	0	0	2	5

Remarkably less flash-rust formation was seen with the NALZIN® FA 179 treated paint. Despite a very high humidity during the drying period, and a low loading of additive, nearly no flash-rust formation occurred even after 24 hours.

The picture below demonstrates the excellent appearance with NALZIN® FA 179 compared to that of

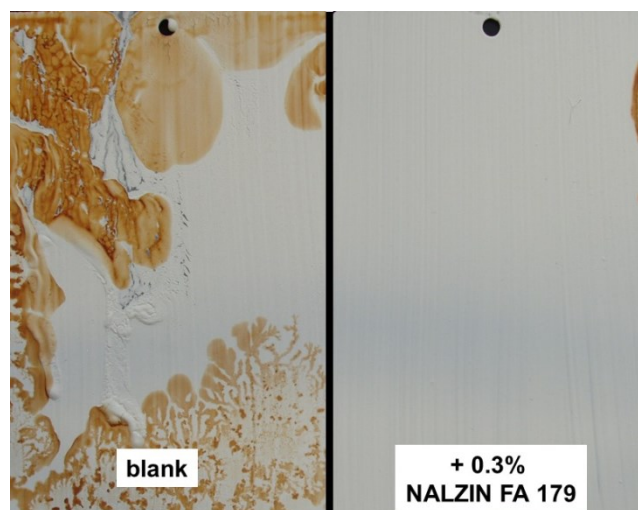

In comparison to sodium benzoate, both NALZIN NALZIN® FA 179 gives significantly improved flash-rust resistance.

	Flash-rust formation after 2 h	Scrub resistance index after 4 week
Blank	80 %	100
NALZIN® FA 179	0 %	113
Sodium benzoate (10%in water)	45 %	48

Moreover, unlike sodium benzoate, the NALZIN® product does not promote water sensitivity. This effect is visualized as scrub resistance.

Conclusion


The results have shown that NALZIN® FA 179 acts an effective flash rust inhibitor for aqueous paint and coating systems.

- ◆ Better long-term stability
- ◆ Form water-insoluble complex in paint film during drying
- ◆ Minimized effect on water sensitivity of paint film: better salt spray stability
- ◆ Water dispensible
- ◆ Better in-can corrosion resistance than sodium benzoate, sodium nitrite

Test methods

The standard method for the evaluation of flash-rust resistance is carried out in a humid, closed atmosphere. A cleaned and degreased steel panel is coated with the test paint and fixed vertically in a shallow dish which is filled with 40°C warm water. The panel is covered with a glass beaker and the flash-rust formation is reported visually over time (see Figure 1), initially at 30 minutes intervals and up to 24 hours.

The test paint is specifically chosen to show flash-rusting. Typically a standard high PVC latex paint is used.

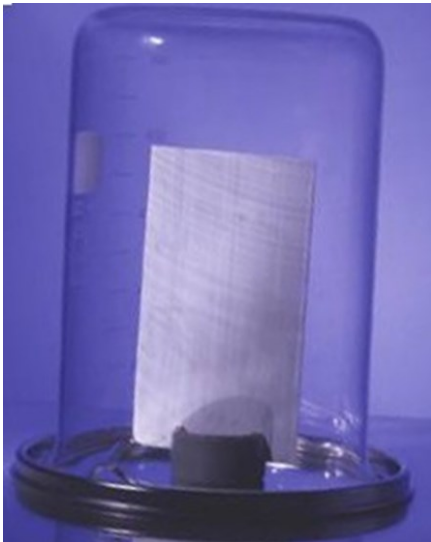

NOTE: The information herein is currently believed to be accurate. We do not guarantee its accuracy. Purchasers shall not rely on statements herein when purchasing any products. Purchasers should make their own investigations to determine if such products are suitable for a particular use. The products discussed are sold without warranty, express or implied, including a warranty of merchantability and fitness for use. Purchasers will be subject to a separate agreement which will not incorporate this document.

© Copyright 2020, Elementis, Inc. All rights reserved. Copying and/or downloading of this document or information therein for republication is not allowed unless prior written agreement is obtained from Elementis, Inc.

® Registered trademark of Elementis, Inc.

North America

Elementis
469 Old Trenton Road
East Windsor,
NJ 08512, USA
Tel:+1 609 443 2500
Fax:+1 609 443 2422

Europe

Elementis UK Ltd.
c/o Elementis GmbH
Stolberger Strasse 370
50933 Cologne, Germany
Tel:+49 221 2923 2066
Fax:+49 221 2923 2011

Asia

Deuchem (Shanghai) Chemical Co., Ltd.
99, Lianyang Road
Songjiang Industrial Zone
Shanghai, China 201613
Tel:+86 21 5774 0348
Fax:+86 21 5774 3563